

## **GENERAL NOTES:**

- 1. THIS PLAN PROVIDES RECOMMENDATIONS FOR LAYOUT SIGNING ONLY, FIELD CONDITIONS ARE TO BE VERIFIED BY THE CITY ENGINEER OR THEIR DESIGNEE AND ADJUSTMENTS MAY BE NEEDED. SIGNS SHALL BE PLACED SUCH THAT THEY ARE NOT BLOCKED BY OTHER ROADWAY FEATURES AND ARE NOT IN A LOCATION THAT IMPEDES DRIVER SIGHT LINES. WHERE POSSIBLE, NEW SIGNS SHOULD BE PLACED AT PROPERTY LINES. FINAL SIGNING PLACEMENT SHALL BE APPROVED BY THE CITY ENGINEER OR THEIR DESIGNEE.
- 2. ALL WORK AND MATERIALS SHALL COMPLY WITH THE 2018 STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION (CALTRANS) STANDARD PLANS, 2014 EDITION OF THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (CA MUTCD), AND STANDARD SPECIFICATIONS AND APPLICABLE CITY OF PALO ALTO STANDARDS UNLESS OTHERWISE STATED.
- 3. CITY OF PALO ALTO SPECIFICATIONS SHALL SUPERSEDE THOSE OF THE CALTRANS STANDARD PLANS AND SPECIFICATIONS WHERE DISCREPANCIES EXIST.
- 4. A LIST OF MATERIALS PROPOSED BY THE CONTRACTOR TO BE USED ON THE PROJECT SHALL BE SUBMITTED TO THE CITY ENGINEER OR THEIR DESIGNEE FOR APPROVAL PRIOR TO ORDERING ANY EQUIPMENT. THE CONTRACTOR SHALL PROVIDE SIGN PROOFS FOR ALL PROPOSED SIGNS AND OBTAIN CITY APPROVAL
- 5. ALL SIGN CODES REFER TO THE 2014 EDITION OF THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (CA MUTCD) UNLESS OTHERWISE NOTED.
- 6. ALL EXISTING SIGNING AND STRIPING SHALL REMAIN UNLESS OTHERWISE NOTED.
- CONTRACTOR IS RESPONSIBLE FOR VERIFYING THAT THE MINIMUM SIGHT DISTANCE IS MET PRIOR TO PLACEMENT OF TRAFFIC CONTROL DEVICES SHOWN ON PLANS. IF THE SIGHT DISTANCE CANNOT BE MET, CONTRACTOR WILL NOTIFY ENGINEER PRIOR TO PLACEMENT OF TRAFFIC CONTROL DEVICES.
- 8. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN PERMIT NECESSARY TO PERFORM THE IMPROVEMENTS SHOWN IN THESE PLANS FROM THE APPROPRIATE AGENCIES AND TO COMPLY WITH THE AGENCIES' REQUIREMENTS. THE CONTRACT MUST COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL LAWS.
- 9. THE CONTRACTOR IS RESPONSIBLE FOR VERIFICATION OF ALL EXISTING UNDERGROUND UTILITIES WHETHER OR NOT THEY ARE SHOWN ON THESE PLANS. THE CONTRACTOR SHALL CONTACT USA (800-642-2444) AT LEAST 48 HOURS BEFORE BEGINNING WORK.

# 4020 ORME



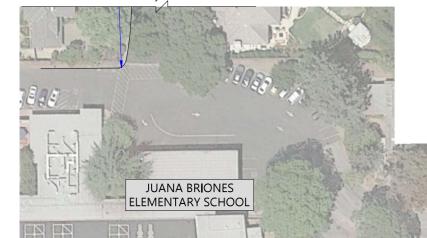

# WORK ORDER (SHEET 1 OF 2)

#### JUANA BRIONES ELEMENTARY SCHOOL

- 1. CONTRACTOR SHALL INSTALL ONE (1) NEW SR4-1(CA) SIGN ON NEW TUBULAR STEEL POST.
- 2. CONTRACTOR SHALL INSTALL ONE (1) NEW SR4-1(CA) SIGN ON EXISTING LIGHT POST.
- 3. CONTRACTOR SHALL INSTALL ONE (1) NEW SW24-3(CA) SIGN ON NEW TUBULAR STEEL POST.
- 4. CONTRACTOR SHALL INSTALL ONE (1) NEW SW24-3(CA) SIGN ON EXISTING LIGHT POST
- 5. CONTRACTOR SHALL INSTALL TWO (2) NEW S5-3 SIGNS ON NEW TUBULAR STEEL POSTS.

## LEGEND:

**GEORGIA** 

- INSTALL NEW SIGN ON NEW POST
- INSTALL NEW SIGN ON EXISTING SIGN POST
- INSTALL NEW SIGN ON EXISTING STREET LIGHT POLE 赏
- REMOVE EXISTING SIGN AND POST
- REMOVE EXISTING SIGN AS NOTED, POST AND OTHER SIGNS TO BE PROTECTED IN PLACE

## SIGN LEGEND:











**GEORGIA AVE** 

(BETWEEN ORME ST & ABEL AVE) 580 4111 576 572 AMARANTA GEORGIA GEORGIA **GEORGIA** TO TO - SW24-3(CA) 4115 - 55-3 AMARANTA

**REVIEW SUBMITTAL** NOT FOR CONSTRUCTION

JUANA BRIONES ELEMENTARY SCHOOL

## **GENERAL NOTES:**

- 1. THIS PLAN PROVIDES RECOMMENDATIONS FOR LAYOUT SIGNING ONLY. FIELD CONDITIONS ARE TO BE VERIFIED BY THE CITY ENGINEER OR THEIR DESIGNEE AND ADJUSTMENTS MAY BE NEEDED. SIGNS SHALL BE PLACED SUCH THAT THEY ARE NOT BLOCKED BY OTHER ROADWAY FEATURES AND ARE NOT IN A LOCATION THAT IMPEDES DRIVER SIGHT LINES. WHERE POSSIBLE, NEW SIGNS SHOULD BE PLACED AT PROPERTY LINES. FINAL SIGNING PLACEMENT SHALL BE APPROVED BY THE CITY ENGINEER OR THEIR DESIGNEE.
- 2. ALL WORK AND MATERIALS SHALL COMPLY WITH THE 2018 STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION (CALTRANS) STANDARD PLANS, 2014 EDITION OF THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (CA MUTCD), AND STANDARD SPECIFICATIONS AND APPLICABLE CITY OF PALO ALTO STANDARDS UNLESS OTHERWISE STATED.
- 3. CITY OF PALO ALTO SPECIFICATIONS SHALL SUPERSEDE THOSE OF THE CALTRANS STANDARD PLANS AND SPECIFICATIONS WHERE DISCREPANCIES EXIST.
- 4. A LIST OF MATERIALS PROPOSED BY THE CONTRACTOR TO BE USED ON THE PROJECT SHALL BE SUBMITTED TO THE CITY ENGINEER OR THEIR DESIGNEE FOR APPROVAL PRIOR TO ORDERING ANY EQUIPMENT. THE CONTRACTOR SHALL PROVIDE SIGN PROOFS FOR ALL PROPOSED SIGNS AND OBTAIN CITY APPROVAL PRIOR TO ORDERING
- 5. ALL SIGN CODES REFER TO THE 2014 EDITION OF THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (CA MUTCD) UNLESS OTHERWISE NOTED.
- 6. ALL EXISTING SIGNING AND STRIPING SHALL REMAIN UNLESS OTHERWISE NOTED.
- 7. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THAT THE MINIMUM SIGHT DISTANCE IS MET PRIOR TO PLACEMENT OF TRAFFIC CONTROL DEVICES SHOWN ON PLANS. IF THE SIGHT DISTANCE CANNOT BE MET, CONTRACTOR WILL NOTIFY ENGINEER PRIOR TO PLACEMENT OF TRAFFIC CONTROL DEVICES.
- 8. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN PERMIT NECESSARY TO PERFORM THE IMPROVEMENTS SHOWN IN THESE PLANS FROM THE APPROPRIATE AGENCIES AND TO COMPLY WITH THE AGENCIES' REQUIREMENTS. THE CONTRACT MUST COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL LAWS.
- 9. THE CONTRACTOR IS RESPONSIBLE FOR VERIFICATION OF ALL EXISTING UNDERGROUND UTILITIES WHETHER OR NOT THEY ARE SHOWN ON THESE PLANS. THE CONTRACTOR SHALL CONTACT USA (800-642-2444) AT LEAST 48 HOURS BEFORE BEGINNING WORK.

## WORK ORDER (SHEET 2 OF 2)

#### JUANA BRIONES ELEMENTARY SCHOOL

- 1. CONTRACTOR SHALL INSTALL TWO (2) NEW SW24-3(CA) SIGNS ON NEW TUBULAR STEEL POSTS.
- 2. CONTRACTOR SHALL INSTALL TWO (2) NEW S5-3 SIGNS ON NEW TUBULAR STEEL POSTS.
- 3. CONTRACTOR SHALL INSTALL TWO (2) NEW SR4-1(CA) SIGNS ON NEW TUBULAR STEEL POSTS.
- 4. CONTRACTOR SHALL REMOVE TWO (2) "25" PAVEMENT LEGENDS AS INDICATED.

#### LEGEND:

- INSTALL NEW SIGN ON NEW POST
- H INSTALL NEW SIGN ON EXISTING SIGN POST
- INSTALL NEW SIGN ON EXISTING STREET LIGHT POLE
- REMOVE EXISTING SIGN AND POST
- REMOVE EXISTING SIGN AS NOTED, POST AND OTHER SIGNS TO BE PROTECTED IN PLACE

#### SIGN LEGEND:











698 MAYBELL \$€

665


MAYBELL

— SR4-1(CA)

651

MAYBELL



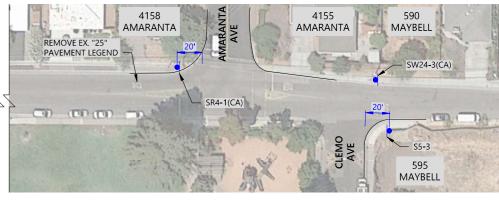



669

MAYBELL

MAYBELL AVE
(BETWEEN MAYBELL WAY & CLEMO AVE)